

Specifications

Standards Compliance

- ANSI A92.3
- CSA B354.1
- CE Compliance
- AS 1418.10

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe


The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334
Email: infoeurope@genieind.com

www.genieindustries.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment, or to otherwise act irresponsibly, may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2005 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company. AWP30S 3.5K 0305A. Part No. 109330

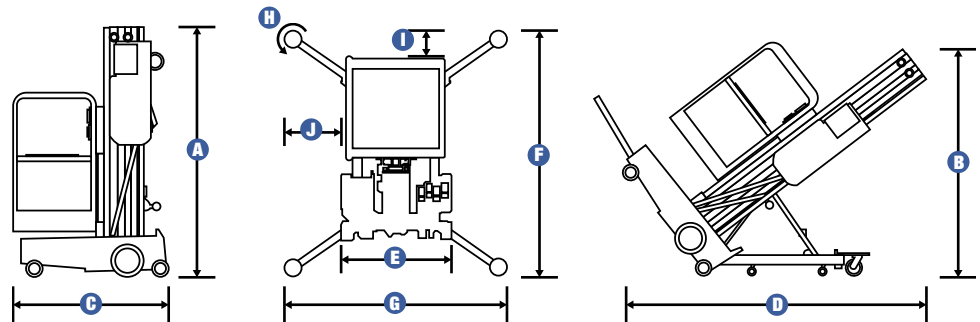

MODELS	AWP™-30S Standard		AWP™-30S Narrow		AWP™-30S RT	
	US	Metric	US	Metric	US	Metric

MEASUREMENTS:

Working height*	35 ft 6 in	11.0 m	35 ft 6 in	11.0 m	35 ft 6 in	11.0 m
Platform height	29 ft 6 in	9.0 m	29 ft 6 in	9.0 m	29 ft 6 in	9.0 m
A Height- stowed	78 in	1.98 m	78 in	1.98 m	79 in	2 m
B - tilted back**	74.5 in	1.9 m				
C Length- stowed	53 in	1.35 m	55 in	1.4 m	58 in	1.47 m
D - tilted back**	83 in	2.1 m				
E Width	29 in	74 cm	22 in	56 cm	30 in	76 cm
Lift Capacity- ANSI/CE	350 lbs	159 kg	350 lbs	159 kg	350 lbs	159 kg
- CSA	300 lbs	136 kg	300 lbs	136 kg	350 lbs	159 kg

PRODUCTIVITY:

F G ANSI: Outrigger footprint (l/w)	69/61 in	1.75/1.55 m	72/58 in	1.83/1.47 m	72/58 in	1.83/1.47 m
H Corner access	19 in	48 cm	19 in	48 cm	19 in	48 cm
I J Wall access front/side	5/17 in	13/43 cm	7/17 in	18/43 cm	7/17 in	18/43 cm
F G CSA: Outrigger footprint (l/w)	97/89 in	2.46/2.26 m	95/90 in	2.4/2.3 m	95/90 in	2.4/2.3 m
H Corner access	37 in	94 cm	38 in	97 cm	38 in	97 cm
I J Wall access front/side	19/32 in	48/81 cm	19/33 in	48/84 cm	19/33 in	48/84 cm

CE Indoor:

F G Outrigger footprint (l/w)	76/68 in	1.93/1.73 m	83/74 in	2.1/1.88 m	83/74 in	2.1/1.88 m
H Corner access	22 in	56 cm	27.5 in	70 cm	27.5 in	70 cm
I J Wall access front/side	8/21 in	20/53 cm	9/20 in	23/51 cm	9/20 in	23/51 cm

CE Outdoor:

F G Outrigger footprint (l/w)	117/110 in	3/2.8 m	130/136 in	3.3/3.45 m	130/136 in	3.3/3.45 m
H Corner access	27 in	69 cm	61 in	1.55 m	61 in	1.55 m
I J Wall access front/side	27/42 in	69/107 cm	35/55 in	89 cm/1.4 m	35/55 in	89 cm/1.4 m

Platform Dimensions	Length	Width	Height
Standard platform	27 in (69 cm)	26 in (66 cm)	44.75 in (114 cm)
Gated standard platform	27 in (69 cm)	26 in (66 cm)	44.75 in in (114 cm)
Gated ultra narrow platform	22 in (56 cm)	18 in (46 cm)	44.75 in in (114 cm)
Gated narrow platform	26 in (66 cm)	20 in (51 cm)	44.75 in in (114 cm)
Standard fiberglass platform	29 in (74 cm)	26.5 in (67 cm)	43.5 in (110 cm)
Narrow fiberglass platform	26 in (66 cm)	22 in (56 cm)	43.5 in (110 cm)


POWER:

Power source: AC or DC models	12V / 110/50-60 Hz or 220/50-60 Hz					
Weight - AC models	777 lbs	352 kg	724 lbs	328 kg	729 lbs	331 kg
- DC models	867 lbs	393 kg	814 lbs	369 kg	819 lbs	371 kg

*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

**Tilt back height with standard platform. For tilt back height with other platforms, please contact your sales representative.

***Corner of platform top rail to corner of wall with ability to rotate leveling jack handle

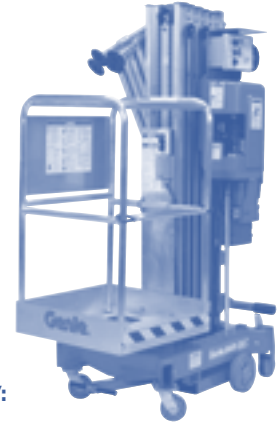

Easily Configured to Meet Your Needs:

PLATFORM OPTIONS

- Sliding mid-rail standard platform
- Gated standard platform
- Gated ultra narrow platform
- Gated narrow platform
- Standard fiberglass platform
- Narrow fiberglass platform

POWER OPTIONS

- AC power 110 V / 50-60 Hz
- AC power 220 V / 50-60 Hz
- DC power 110 V / 60 Hz with automatic “smart” charging system
- DC power 110/230 V 50-60 Hz worldwide model
- Air motor power 1.5 hp (1.1 kw)

BASE OPTIONS

- Standard base
- Narrow base
- Rough terrain (RT) base

Standard Features

MEASUREMENTS:

- AWP™-30S has 35 ft 6 in (11 m) working height
- AWP™-30S has 29 ft 6 in (9 m) platform height
- AWP™-30S has 29 in (74 cm) standard base width
- AWP™-30S has 22 in (56 cm) narrow base width
- AWP™-30S has 30 in (76 cm) RT base width
- Up to 350 lb (159 kg) lift capacity

POWER:

- AC power 110 V / 50-60 Hz
- AC power 220 V / 50-60 Hz
- DC power 110 V / 60 Hz with automatic “smart” charging system
- DC power 110/230 V / 50-60 Hz - Worldwide model with a voltage adjustable, hertz compensating, automatic “smart” charging system.
- Air motor power 1.5 hp (1.1 kw)

PRODUCTIVITY:

- Sliding mid-rail platform
- AC power to platform
- Auxiliary platform lowering
- Dual activated up/down switch
- Ground fault interrupt power receptacle
- Most rigid mast in the industry
- Small outrigger footprints
- Outrigger storage pockets
- Rocker base system for maneuverability
- Easily rolls through standard doorways
- Easy loading in pick up trucks
- Overhead crane attachment points
- Wide forklift pockets
- Tie down attachment points
- LED lights confirm proper set-up

Options and Accessories

PRODUCTIVITY

- Super-Straddle
- Tilt-back frame option
- Platform locating laser light
- Tool tray
- Fluorescent tube caddy
- Operational warning light and descent alarm package
- Gated standard platform
- Gated ultra narrow platform
- Gated narrow platform
- Standard fiberglass platform
- Narrow fiberglass platform
- Narrow base conversion kit (RT only)
- RT conversion kit (Narrow only)

SUPER-STRADDLE OPTION:

	AWP™-30S All Bases		AWP™-30S Standard		AWP™-30S Narrow		AWP™-30S RT	
	US	Metric	US	Metric	US	Metric	US	Metric
Height	70 in	1.8 m						
Length (adjustable)	9 ft 1 in - 10 ft 8 in	2.77 - 3.25 m						
Width	38 in	97 cm						
Width w/required outriggers:								
ANSI			6 ft 8.25 in	2.03 m	6 ft 8.25 in	2.03 m	6 ft 8.25 in	2.03 m
CSA			10 ft .25 in	3.05 m	10 ft .25 in	3.05 m	10 ft .25 in	3.05 m
CE Indoor			7 ft 5.25 in	2.26 m	8 ft 4.25 in	2.55 m	8 ft 4.25 in	2.55 m
CE Outdoor			12 ft 4.25 in	3.76 m	14 ft 10.25 in	4.53 m	14 ft 10.25 in	4.53 m
Wheelbase (adjustable)	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m						
Straddle clearance	4 ft	1.22 m						
Height to ladder	27 in	69 cm						
Height to fixed wheel	40 in	1 m						
Storage dimensions	80 x 37 x 24 in	2 x .94 x .61 m						
Weight	576 lbs	261 kg						