


## ASTRO AIR TRACTION HOIST



ASTRO A88 TO (CE)

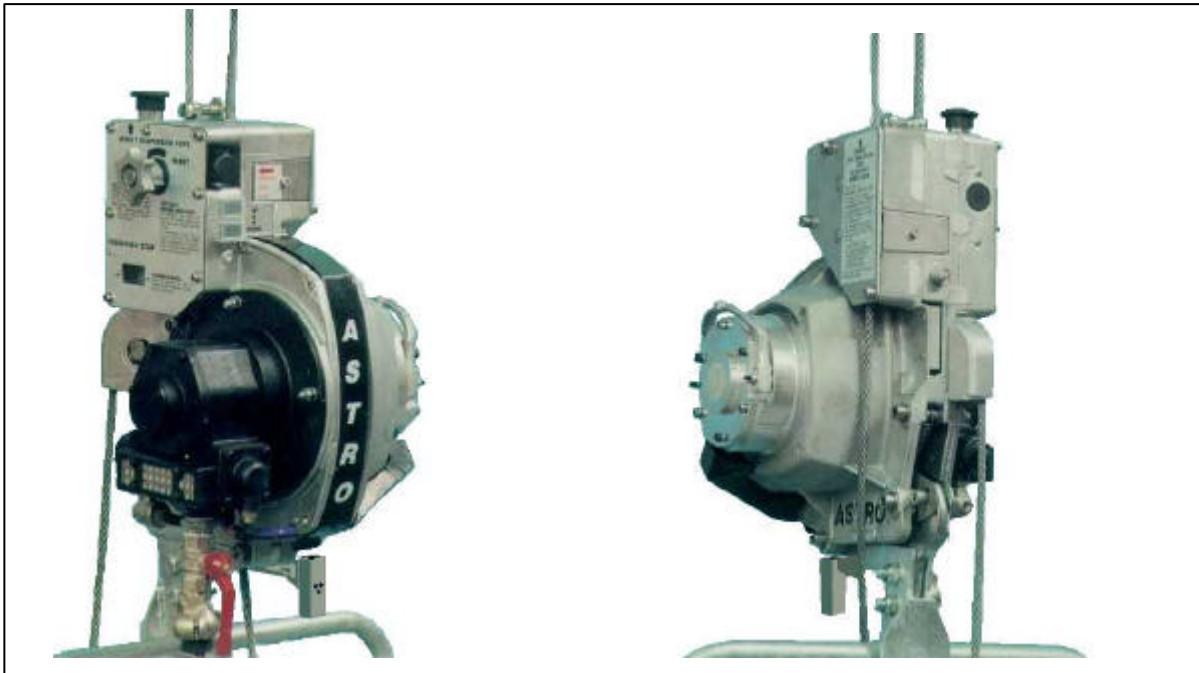

Model	Air Motor	Capacity	Air supply
A88-TO	2.8 HP vane type	675 kg	6 bar, 2.7m <sup>3</sup> /min. FAD





### Standard features

- Self reeving traction hoist
- Load dependant traction system
- Hoist-mounted hold to run 'up/down' operating buttons
- **Two** built-in safeties:
  - slack rope safety device
  - overspeed safety device
- Top limit switch
- Overload detection device
- Controlled emergency descent system
- Service brake
- Emergency shut-off valve
- Climbing speed: 7-10 m/min.
- Self weight : 45 kg
- Safety rope and suspension cable:
  - Ø 9.5 mm (80 kN)

### Filter lubricator

- filter: separates water out of air supply
- lubricator: vaporises oil droplets into air supply

Product conform to CE regulations.

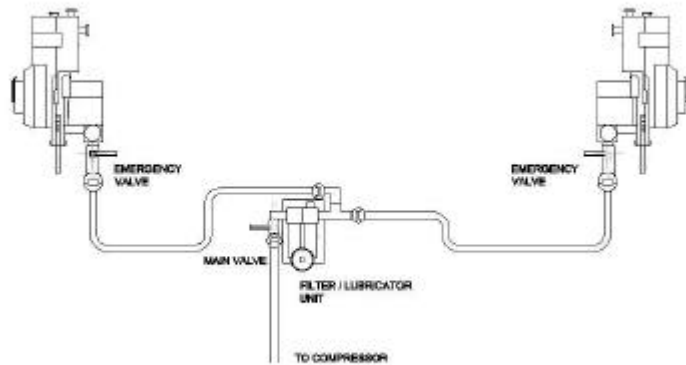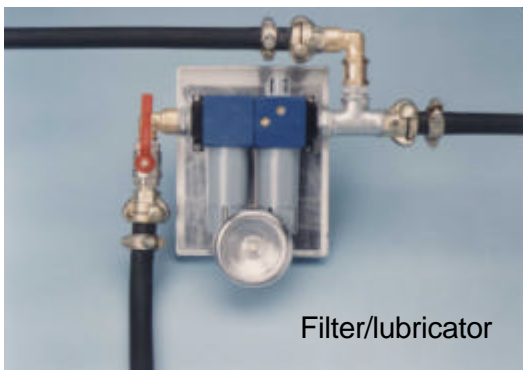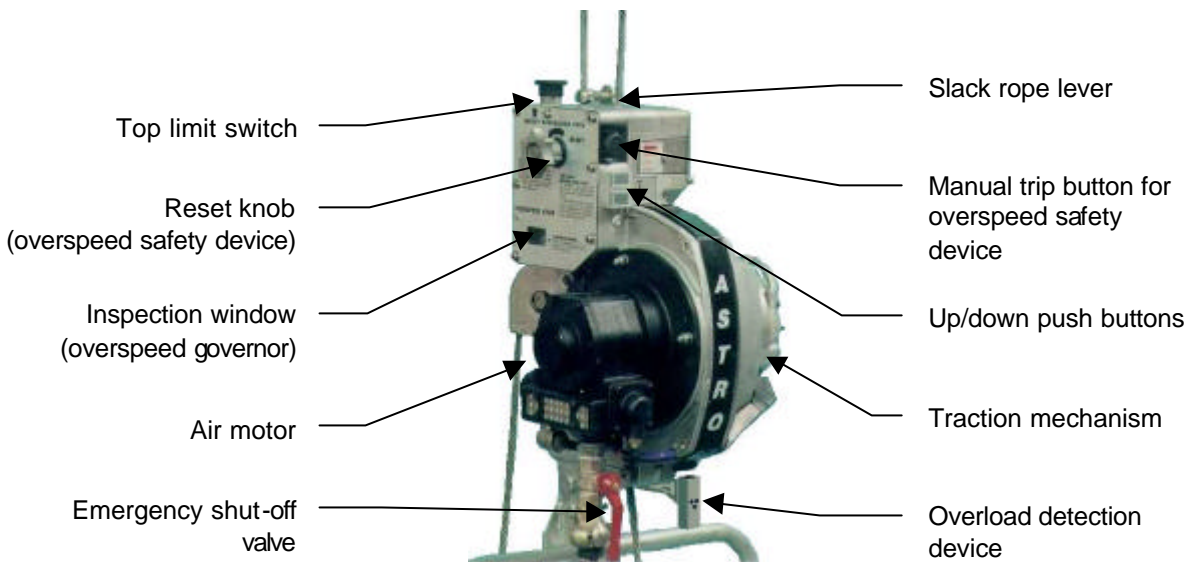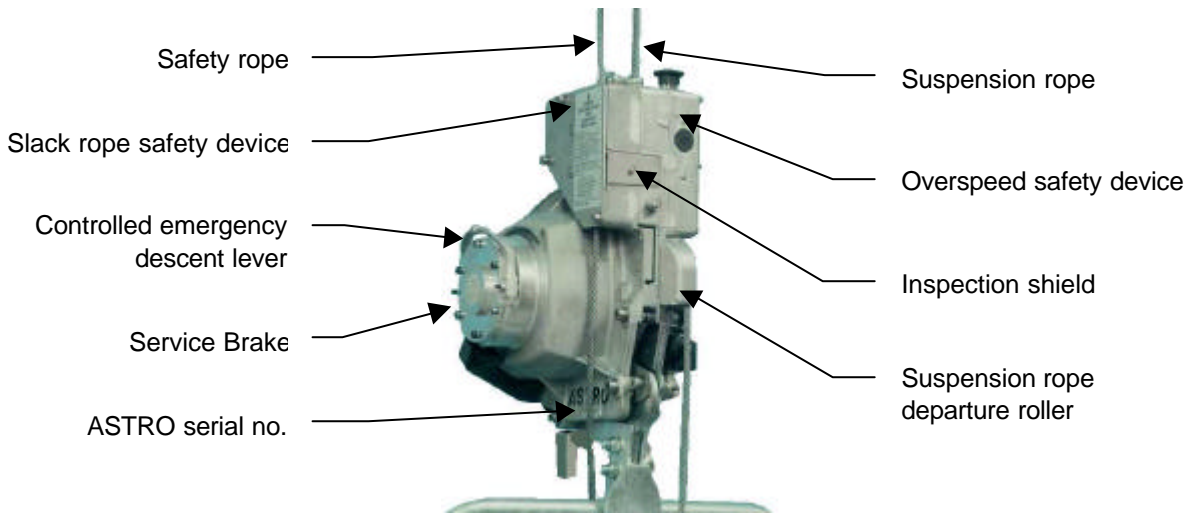

Ref.: 38104-01-A	Issue Date: 16-Aug-2002
<p>POWER CLIMBER bvba          Tel: +32-3-451.05.00          Fax: +32-3-451.05.01          E-mail: <a href="mailto:Info@PowerClimber.be">Info@PowerClimber.be</a></p>	<p>POWER CLIMBER ASIA Ltd.          Tel: +852-2310.2855          Fax: +852-2745.0755          E-mail: <a href="mailto:Infopcal@PowerClimber.com.hk">Infopcal@PowerClimber.com.hk</a></p>